



भारतीय विज्ञान अकादमी

डाक पेटी सं. 8005, सी.वी. रामन अवेन्यू, बेंगलूर - 560 080,

INDIAN ACADEMY OF SCIENCES

P.B No. 8005, C.V. Raman Avenue, Bengaluru -560 080,

Phone No. 080-2266 1224/91-080-22661200 / 22661203 Fax: 080-2361 6094

Website: www.ias.ac.in e-mail: office@ias.ac.in, execsec@ias.ac.in

Ref No. ION-13/PUR/AA/CIVIL/ES/2021-22

तारीख / Date: 21/09/2021

ENQUIRY / NOTICE SEEKING QUOTATIONS FROM REPUTED CONTRACTOR TO CARRY OUT TILES, DADOING AND COMPLETE SETTING OF WASH BASIN WORK GROUND FLOOR - ACADEMY SCOPE OF WORK

To carry out the work using all the necessary material as per the following specification. Your quotation should reach us on or before 29 September 2021 (12.00 Noon).

Action to be initiated: : In the ground floor north west area adjacent to toilet corridor there is a temporary wash basin setup which is currently in usage is found to have repair & new works listed below:

Sl.no	Place of Execution	Type of work	Measurement & Specifications
1.	Ground Floor For further clarification please contact Mr Arun A (Mob No. 8073541347)	Removal of pop ceiling & providing a maintenance door. Due to water leakage from plumbing line which is laid from first floor to ground floor in the wash basin area. The ceiling POP has been damaged and worn out. Water leakages can be seen through the opening cut-out of the plumbing line. Hence the existing ceiling POP needs to be removed. The ceiling of wash basin area after the removal of POP needs to be closed with a maintenance door opening.	3.9 Feet X 4.2 Feet
2.		Plumbing Refer drawing as per Annexure-1	Leakage rectification & changing its pathway also changing water lines according to new wash basin setup
3.		Changing wash basin	South facing
4.		Provision for holding wash basin	Brick work or Stainless steel setup
5.		Laying of tiles for the same area	17 Sq. feet
6.		Dadoing	Laying of wall tiles all the three sides to height of 4.5 feet
7.		Mirror & towel rings	Wash basin area
8.		Lighting and electrical installations according to requirement	Switches & LED light (Geyser & water purifier if necessary)

Note: 1. The work also involves inspection of existing plumbing lines with water taps and addition if necessary (Both sewage & water lines)

2. The provision for electrical switches along with lighting has to be made for the above mentioned area.
3. The above work involves labour charges along with materials of ISI mark.
4. Bills will be paid for executed amount of work.

It is recommended for the contractor to visit the site before submitting your quotation.

Date of Completion of Work: Within 07 Days from the issuance of WO / actual date will be notified by the Academy.


GST extra as applicable shall be included in the quotation.

TERMS AND CONDITIONS

1. As this Academy is Non-Profit Organisation, applicable discount by be allowed.
2. Your quotation should be enclosed in sealed cover and bear reference to our Enquiry No. and Date, and addressed to the Administrative Assistant (Purchase), Indian Academy of Sciences, P.B No. 8005, C.V Raman Avenue, Sadashivanagar, Bengaluru - 560 080.
3. Our payment terms are 15 working days from the date of satisfactory completion of work.
4. The Executive Secretary, Indian Academy of Sciences, reserves the right to reject any or all offers without assigning any reason.


21/9/2021
Executive Secretary

Drawing Reference for changing plumbing line
Ground floor Area.

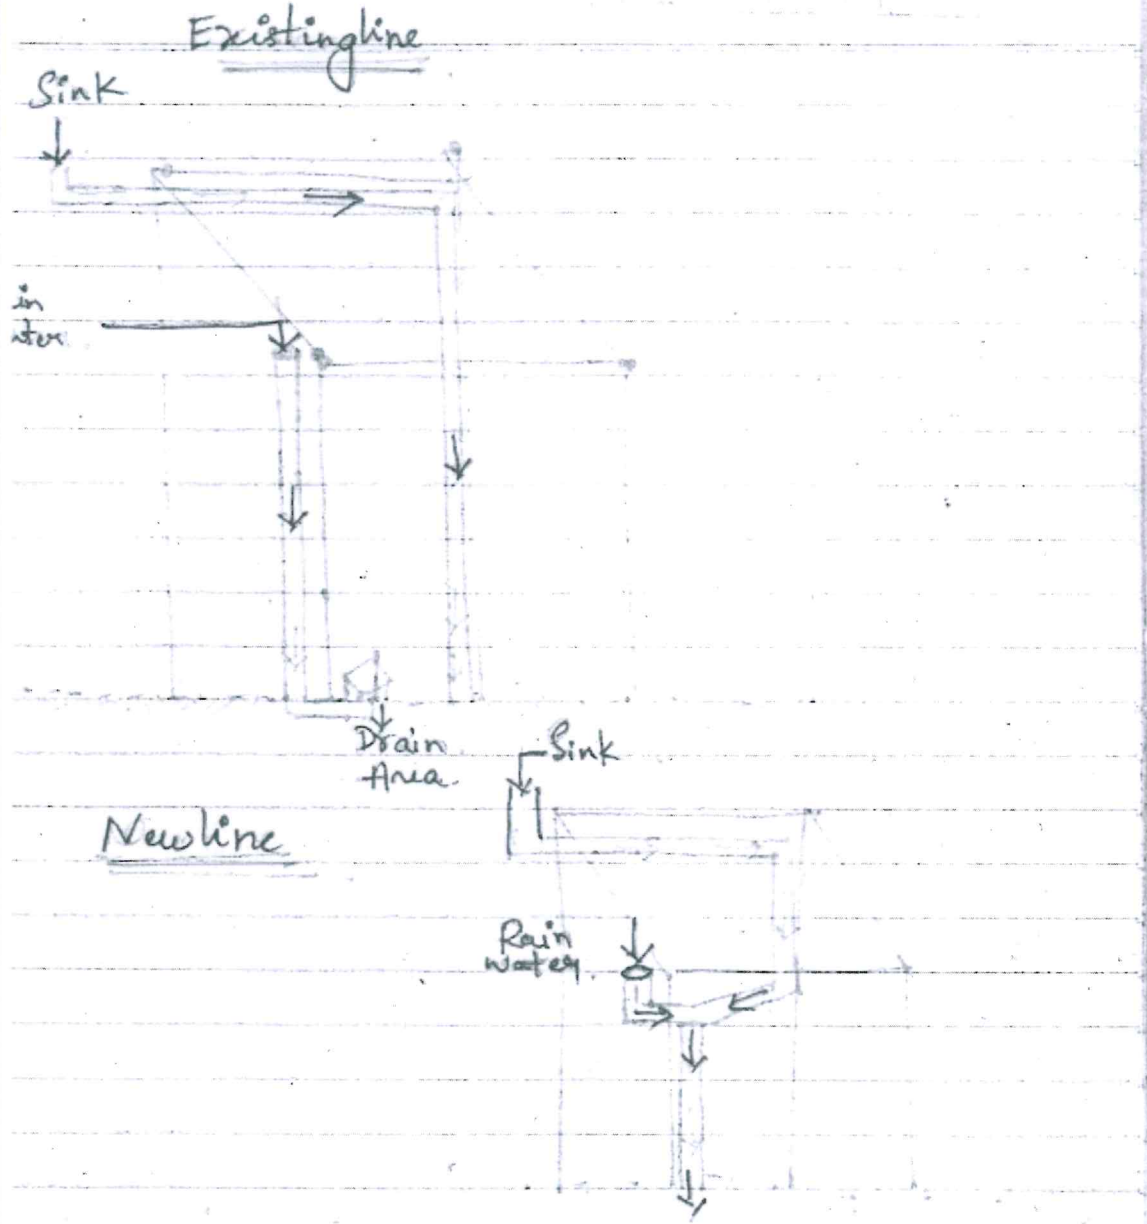

Pran A