

C V R Murty
 Indian Institute of Technology
 Kanpur, Kanpur 208 016, India
 Email: eqtips@iitk.ac.in

Learning Earthquake Design and Construction

20. How do Beam–Column Joints in RC Buildings Resist Earthquakes?

Why Beam-Column Joints are Special

In RC buildings, portions of *columns* that are common to beams at their intersections are called *beam-column joints* (Figure 1). Since their constituent materials have limited strengths, the joints have *limited force carrying capacity*. When forces larger than these are applied during earthquakes, joints are severely damaged. Repairing damaged joints is difficult, and so damage must be avoided. Thus, beam-column joints must be designed to resist earthquake effects.

Earthquake Behaviour of Joints

Under earthquake shaking, the beams adjoining a joint are subjected to moments in the same (clockwise or counter-clockwise) direction (Figure 1). Under these moments, the top bars in the beam-column joint are pulled in one direction and the bottom ones in the opposite direction (Figure 2a). These forces are balanced by bond stress developed between concrete and steel in the joint region. If the column is not wide enough or if the strength of concrete in the joint is low, there is insufficient grip of concrete on the steel bars. In such circumstances, the bar slips inside the joint region, and beams lose their capacity to carry load.

Keywords

Earthquake, RC building, beam-column joints.

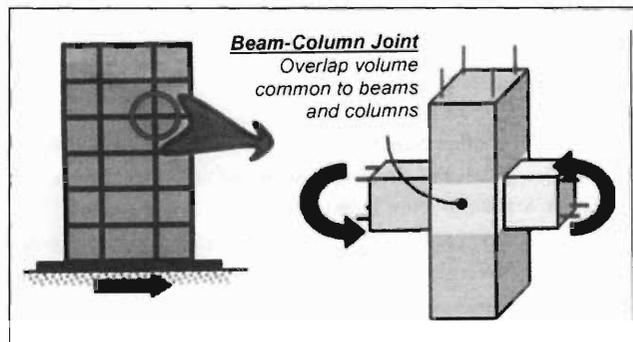


Figure 1. Beam-Column Joints are critical parts of a building – they need to be designed.

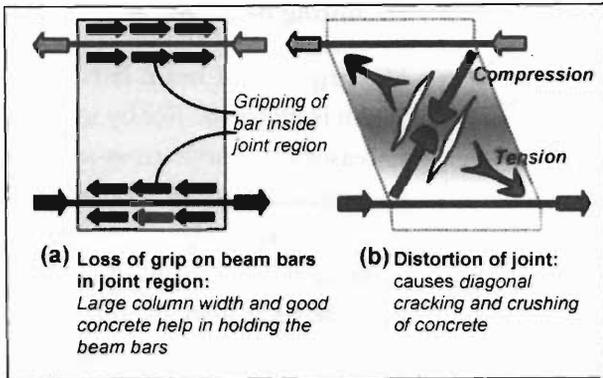


Figure 2. Pull-push forces on joints cause two problems – these result in irreparable damage in joints under strong seismic shaking.


Further, under the action of the above pull-push forces at top and bottom ends, joints undergo geometric distortion; one diagonal length of the joint elongates and the other compresses (Figure 2b). If the column cross-sectional size is insufficient, the concrete in the joint develops diagonal cracks.

Reinforcing the Beam-Column Joint

Problems of diagonal cracking and crushing of concrete in the joint region can be controlled by two mean, namely *providing large column sizes and providing closely spaced closed-loop steel ties around column bars in the joint region* (Figure 3). The ties hold together the concrete in the joint and also resist shear force, thereby reducing the cracking and crushing of concrete.

Providing closed-loop ties in the joint requires some extra effort. Indian Standard IS:13920-1993 recommends continuing the transverse loops around the column bars through the joint region. In practice, this is achieved by preparing the cage of the reinforcement (both *longitudinal bars and stirrups*) of all beams at a floor level to be prepared on top of the beam formwork of that level and lowered into the cage (Figures 4a and 4b). However, this may not always be possible particularly when the beams are long and the entire reinforcement cage becomes heavy.

Figure 3. Closed loop steel ties in beam-column joints – such ties with 135° hooks resist the ill effects of distortion of joints.

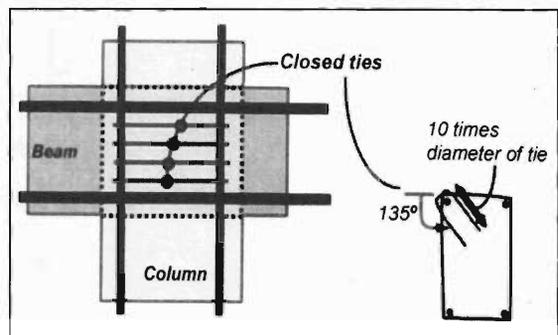

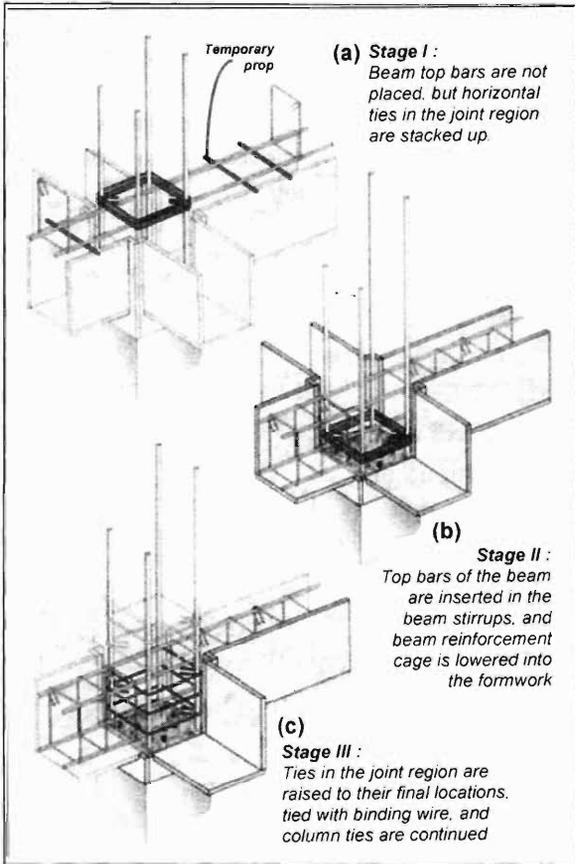


Figure 4. Providing horizontal ties in the joints – three-stage procedure is required.


Anchoring Beam Bars

The gripping of beam bars in the joint region is improved *first* by using columns of reasonably large cross-sectional size. As explained in *Earthquake Tip 19*, the Indian Standard IS:13920-1993 requires building columns in seismic zones III, IV and V to be at least 300 mm wide in each direction of the cross-section when they support beams that are longer than 5m or when these columns are taller than 4m between floors (or beams). The American Concrete Institute recommends a column width of at least 20 times the diameter of largest longitudinal bar used in adjoining beam.

In exterior joints where beams terminate at columns (Figure 5), longitudinal beam bars need to be anchored into the column to ensure proper gripping of bar in joint. The length of anchorage for a bar of grade

Fe415 (characteristic tensile strengths of 415MPa) is about 50 times its diameter. This length is measured from the face of the column to the end of the bar anchored in the column. In

Figure 5. Anchorage of beam bars in exterior joints – diagrams show elevation of joint region.

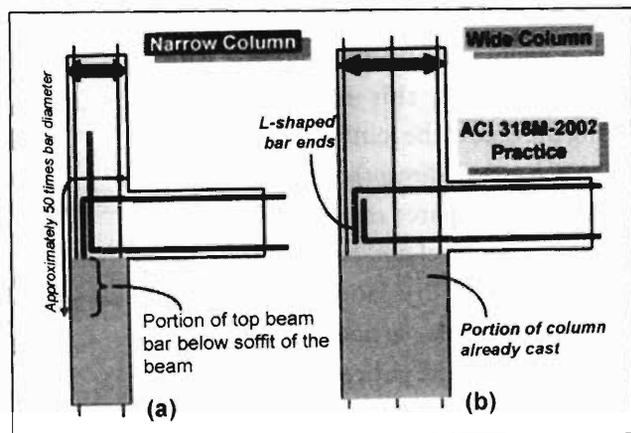

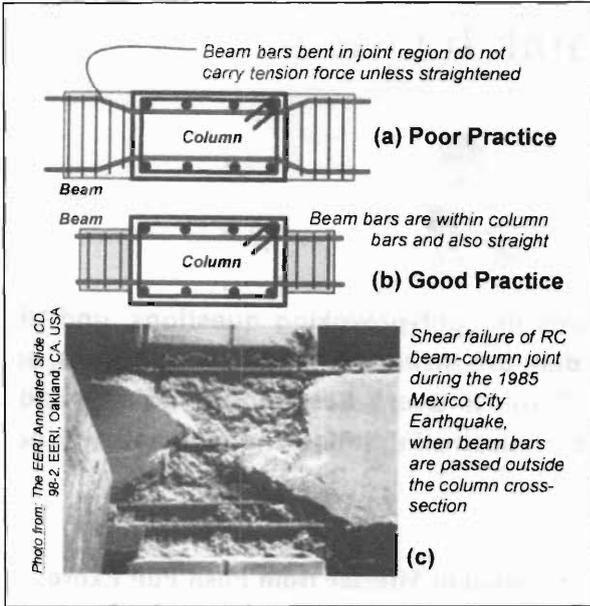


Figure 6. Anchorage of beam bars in interior joints – diagrams (a) and (b) show cross-sectional views in plan of joint region.

columns of small widths and when beam bars are of large diameter (*Figure 5a*), a portion of beam top bar is embedded in the column that is cast up to the soffit of the beam, and a part of it overhangs. It is difficult to hold such an overhanging beam top bar in position while casting the column up to the soffit of the beam. On the other hand, if column width is large, the beam bars may not extend below the soffit of the beam (*Figure 5b*). Thus, it is preferable to have columns with sufficient width. Such an approach has been used in the American practice [ACI1318M, 2002].

In interior joints, the beam bars (both top and bottom) need to go through the joint without any cut in the joint region. Also these bars must be placed within the column bars and with no bends (*Figure 6*).

Suggested Reading

- [1] ACI 318 M, Building Code Requirements for Structural Concrete and commentary, American Concrete Institute, Farmington Hills (MI), USA, 2002.
- [2] IS 13920, Indian Standard Code of Practice for Ductile Detailing of Reinforced Concrete Structures Subjected to Seismic Forces, Bureau of Indian Standards, New Delhi, 1993.
- [3] SP 123, Design of Beam-Column Joints for Seismic Resistance, Special Publication, American Concrete Institute, USA, 1991.

Related IITK-BMTPC Earthquake Tip:

Tip17: How do Earthquakes Affect Reinforced Concrete Buildings?

Tip18: How do Beams in RC Buildings Resist Earthquakes?

Tip 19: How do Columns in RC Buildings Resist Earthquakes?

Suggestions/comments may be sent to: eqtips@iitk.ac.in.

